

**Ⓜ 10NF**

RoHS Compliant & Pb-Free  
SMD NANO FUSE (FAST-BLOW)

**TECHNICAL PARAMETERS/**

PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证					REFERENCE (A <sup>2</sup> .Sec.) (RoHS) IT 参考值
		cURus					
		H	L1	L2	L3	L4	
10NF-300	30A	●	●	●	●	●	
10NF-400	40A	●	●	●	●	●	
10NF-500	50A	●	●	●	●	●	
10NF-600	60A	●	●	●	●	●	1050
10NF-700	70A	●	●	●	●	●	1400
10NF-800	80A	●	●	●	●	●	3000
10NF-900	90A	●	●	●	●	●	4300
10NF-1000	100A	●	●	●	●	●	6900

**DENOTES FOR APPROVED**

H DENOTES FOR 250V AC	H	250V AC
L1 DENOTES FOR 115V DC	L1	115V DC
L2 DENOTES FOR 100V DC	L2	100V DC
L3 DENOTES FOR 75V DC	L3	75V DC
L4 DENOTES FOR 32V DC	L4	32V DC

**ELECTRICAL CHARACTERISTICS/**

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
100%	4 hours Min.	最快 4 小时
200%	60 seconds Max.	最慢 60 秒

**Standards/** UL 248-1, UL 248-14,  
-55 +100 .  
**: IEC** IEC60068-2-58  
**IEC** IEC60068-2-58

**PACKING/**

500 PIECES TAPED AND REELED IN ONE BOX  
500


**BOX SIZE/**

**INTERRUPTING CAPACITY /**

500A at 115V DC  
1000A at 100V DC  
1500A at 75V DC  
3500A at 32V DC  
500A at 250V AC

**Dimensions/**

Unit mm

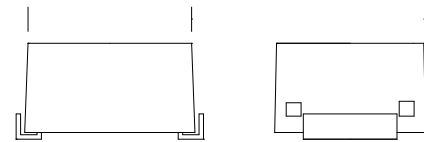

**10NF THE AVERAGE I-T CHARACTERISTICS CURVE  
(FOR YOUR REFERENCE)**

**10NF I-T ( )**