

1206, RoHS Compliant & Pb-Free  
SURFACE MOUNT CHIP FUSE (SLOW-BLOW)

TECHNICAL PARAMETERS/ :

PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证						REFERENCE (A <sup>2</sup> .Sec.) (RoHS) I <sup>2</sup> T 参考值
		UR			cUR			
		L1	L2	L3	L1	L2	L3	
12T-0500L	500mA			●			●	0.0182
12T-0630L	630mA			●			●	0.0418
12T-0750L	750mA			●			●	0.0684
12T-0800L	800mA			●			●	0.0699
12T-010L	1A			●			●	0.110
12T-013L	1.25A			●			●	0.125
12T-015L	1.5A			●			●	0.170
12T-016L	1.6A			●			●	0.190
12T-020L	2A			●			●	0.250
12T-025L	2.5A			●			●	0.900
12T-030L	3A			●			●	1.300
12T-032L	3.15A	●	●		●	●		1.401
12T-035L	3.5A	●	●		●	●		1.714
12T-040L	4A	●	●		●	●		2.025
12T-050L	5A	●	●		●	●		4.225
12T-063L	6.3A	●	●		●	●		5.404
12T-070L	7A	●	●		●	●		6.305

DENOTES FOR APPROVED

L1 DENOTES FOR 24V	L1	24V
L2 DENOTES FOR 32V	L2	32V
L3 DENOTES FOR 63V	L3	63V

ELECTRICAL CHARACTERISTICS/ :

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
100%	4 hours Min.	最快 4 小时
200%	1-120 seconds	1-120 秒
300%	0.05-3.00 seconds	0.05-3.00 秒
800%	0.0015-0.05 seconds	0.0015-0.05 秒

PACKING/

5,000PIECES TAPED AND REELED IN ONE BOX

5,000

BOX SIZE/


INTERRUPTING CAPACITY /

50A 63V AC (500mA-3A)      35A 24V AC (3.15A-7A)  
50A 63V DC (500mA-3A)      50A 32V DC (3.15A-7A)


Dimensions/

Unit mm

TOP VIEW/ :

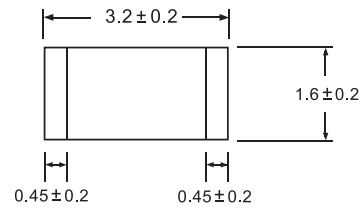

SIDE VIEW/ :



Standards/ UL 248-1, UL 248-14

Operating Temperature/ -55 ~-125


Storing Temperature/ -55 ~-85

Resistance to soldering heat/ 260 10s Max.

Solderability/ 235 ± 5 , 3.5s+0.5/-0s

12T AVERAGE I-T CHARACTERISTICS CURVE  
(FOR REFERENCE ONLY)

12T I-T ( )

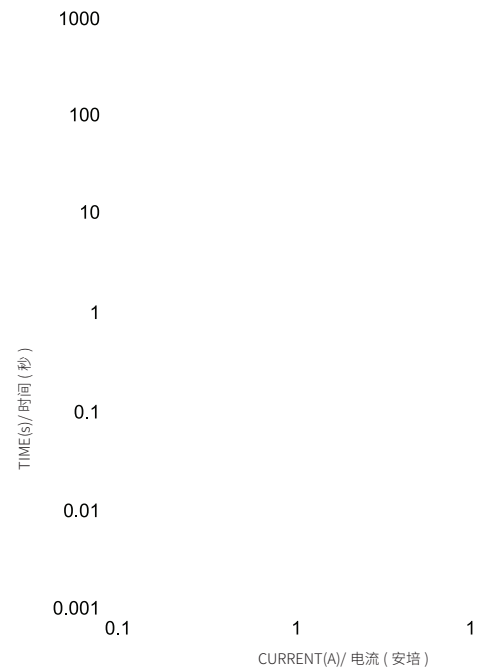

Unit mm