



Φ3.6x10mm IEC STANDARD FUSE
RoHS Compliant & Pb-Free
GLASS TUBE MICROFUSE (TIME-LAG)

BREAKING CAPACITY /

CQC / VDE / cURus:

35A OR 10In 250V AC WHICHEVER IS GREATER


TECHNICAL PARAMETERS/

| PART NO. 目录编号 | CURRENT RATING 额定电流 | Max. VOLTAGE DROP (mV) 最大电压降 | SAFETY APPROVALS 安全认证 | | | | REFERENCE (A ² .Sec.) (RoHS) I ² T 参考值 |
|------------------|------------------------|---------------------------------|--------------------------|-----|-------|-----|--|
| | | | CCC | VDE | cURus | PSE | |
| 30T-0200H | 200mA | 260 | ● | | ● | | 0.1981 |
| 30T-0250H | 250mA | 240 | ● | ● | ● | | 0.3120 |
| 30T-0315H | 315mA | 220 | ● | ● | ● | | 0.5219 |
| 30T-0400H | 400mA | 200 | ● | ● | ● | | 0.8606 |
| 30T-0500H | 500mA | 190 | ● | ● | ● | | 1.323 |
| 30T-0630H | 630mA | 180 | ● | ● | ● | | 2.473 |
| 30T-0800H | 800mA | 160 | ● | ● | ● | | 4.165 |
| 30T-010H | 1A | 140 | ● | ● | ● | ● | 2.811 |
| 30T-013H | 1.25A | 130 | ● | ● | ● | ● | 5.300 |
| 30T-016H | 1.6A | 120 | ● | ● | ● | ● | 6.315 |
| 30T-020H | 2A | 100 | ● | ● | ● | ● | 9.668 |
| 30T-025H | 2.5A | 100 | ● | ● | ● | ● | 16.72 |
| 30T-032H | 3.15A | 100 | ● | ● | ● | ● | 28.92 |
| 30T-040H | 4A | 100 | ● | ● | ● | ● | 60.86 |
| 30T-050H | 5A | 100 | ● | ● | ● | ● | 84.99 |
| 30T-063H | 6.3A | 100 | ● | ● | | | 213.8 |
| 30T-080H | 8A | 80 | ● | | | | 295 |
| 30T-100H | 10A | 75 | ● | | | | 451 |

DENOTES FOR APPROVED

H DENOTES FOR 250V H 250V

Dimensions/

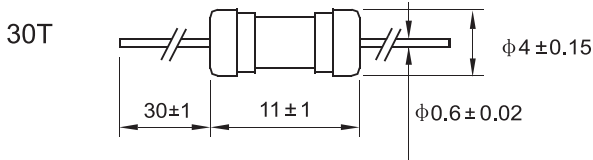

Standards/ IEC 60127 GB 9364

Operating Temperature/ -55 ~125

Storing Temperature/ -55 ~85

Resistance to soldering heat/ 260 10s Max.

Solderability/ 245 ± 5 , 5s± 0.5s

ELECTRICAL CHARACTERISTICS/

| RATING 额定 | | BLOWING TIME 熔断时间 |
|-----------|---------|-------------------|
| 2.1In | Max. 最慢 | 2 minutes |
| 2.75In | Min. 最快 | 400 ms |
| | Max. 最慢 | 10 seconds |
| 4In | Min. 最快 | 150 ms |
| | Max. 最慢 | 3 seconds |
| 10In | Min. 最快 | 20 ms |
| | Max. 最慢 | 150 ms |

30T AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE ONLY)

30T I-T ()

