



RoHS Compliant & Pb-Free
SMD NANO FUSE (SLOW-BLOW)

INTERRUPTING CAPACITY /

150A at 250V AC/DC
500A at 125V AC/DC

TECHNICAL PARAMETERS/

PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证	REFERENCE (A ² .Sec.) (RoHS) I ² T 参考值
		UR/cUR	
4NT-0500H/L	500mA	●	1.30
4NT-0630H/L	630mA	●	2.15
4NT-0800H/L	800mA	●	3.60
4NT-010H/L	1A	●	7.20
4NT-013H/L	1.25A	●	13.00
4NT-016H/L	1.6A	●	16.24
4NT-020H/L	2A	●	28.00
4NT-025H/L	2.5A	●	50.00
4NT-032H/L	3.15A	●	85.00
4NT-035H/L	3.5A	●	112.00
4NT-040H/L	4A	●	141.00
4NT-050H/L	5A	●	190.00

DENOTES FOR APPROVED

H DENOTES FOR 250V H 250V
L DENOTES FOR 125V L 125V

ELECTRICAL CHARACTERISTICS/

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
100%	4 hours Min.	最快 4 小时
250%	60s Max.	最慢 60 秒

Standards/ **UL 248-1, UL 248-14**
Operating Temperature/ **-55 -90**
Storing Temperature/ **-55 ~85**
Resistance to soldering heat/ **260 ± 5 10sMax**
Solderability/ **235 ± 5 3.5+0.5/-0s**

PACKING/


1,500 PIECES TAPED AND REELED IN ONE BOX

1,500

BOX SIZE/

Dimensions/

Unit mm

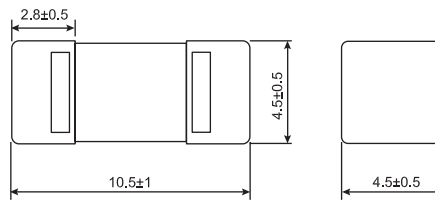

Land Pattern:

3.5± 0.05 4.5± 0.05 3.5± 0.05

5

4NT AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE ONLY)

4NT I-T ()

TIME(S)/时间 (秒)

CURRENT(A)/ 电流 (安培)