



HC10aM 0.5A-32A

Class of Operation:aM

保护特性: aM



Standard/ IEC 60269, GB 13539


INTERRUPTING CAPACITY /

120,000 A at 500V AC (500mA-20A)

120,000 A at 400V AC (20A-32A)

Dimensions/ :

Unit 单位: mm

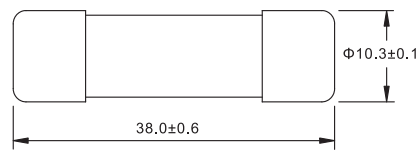

TECHNICAL PARAMETERS/ :

PART NO. 目录编号	CURRENT RATING 额定电流	APPROVALS 安全认证
10aM0.5U5	500mA	● CCC
10aM1U5	1A	● CCC
10aM2U5	2A	● CCC
10aM4U5	4A	● CCC
10aM6U5	6A	● CCC
10aM8U5	8A	● CCC
10aM10U5	10A	● CCC
10aM12U5	12A	● CCC
10aM16U5	16A	● CCC
10aM20U4	20A	● CCC
10aM25U4	25A	○ CCC
10aM30U4	30A	○ CCC
10aM32U4	32A	○ CCC

U4 DENOTES FOR 400V AC
U5 DENOTES FOR 500V AC
● DENOTES FOR APPROVAL
○ DENOTES FOR PENDING


U4 表示 400V AC
U5 表示 500V AC
● 表示已取得安全认证
○ 表示正在申请安全认证

ELECTRICAL CHARACTERISTICS/ :

	4In	6.3In	8In	10In	12.5In	19In
t _{熔断} Operating	—	60s	—	—	0.5s	0.1s
t _{弧前} Pre-arcing	60s	—	0.5s	0.2s	—	—

HC10aM 平均 I-T 曲线图 (仅供参考)

AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE ONLY)

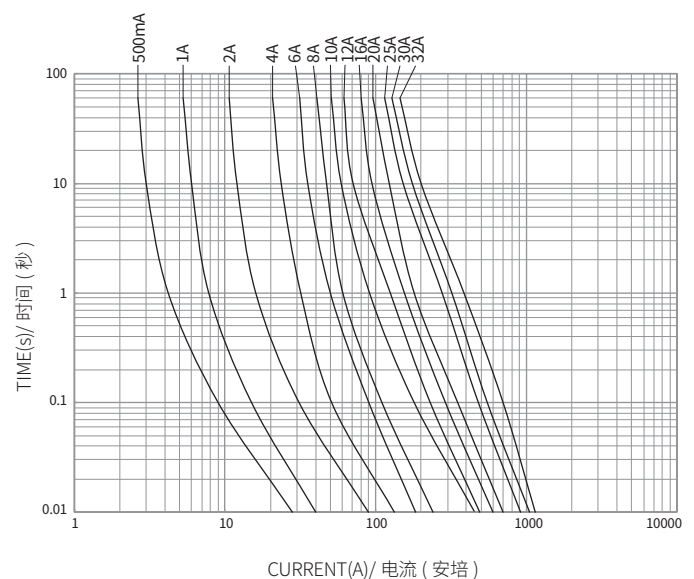

Recommended fuseblocks/fuseholders for 10.3mmx38mm fuses

See Model of product: HC101A HC101D HF-103D HF-104A

适用于 10.3mmx38mm 熔断体的支持件

详见产品型号: HC101A HC101D HF-103D HF-104A

