

HC107EV-T 750V DC 10A-50A EV Fuse

Standard/ GB/T 31465.6

Applicable standard/

UL248-20 GB/T 31465.6



ISO 8820 JASO D622

INTERRUPTING CAPACITY /

20,000 amperes at 750V DC

Dimensions/ :

Unit mm

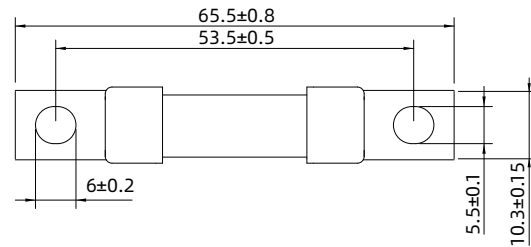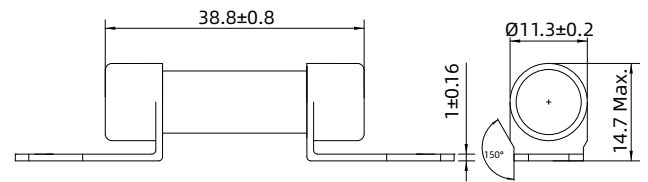

TECHNICAL PARAMETERS/

:

PART NO.	CURRENT RATING	SAFETY APPROVALS
HC107EV10T	10A	
HC107EV15T	15A	
HC107EV20T	20A	
HC107EV25T	25A	
HC107EV30T	30A	
HC107EV35T	35A	
HC107EV40T	40A	
HC107EV50T	50A	

DENOTES FOR APPROVAL

DENOTES FOR PENDING

HC107EV-T I-T ()

AVERAGE I-T CHARACTERISTICS CURVE

(FOR REFERENCE ONLY)

